



FDMT800120DC

N-Channel Dual Cool™ 88 PowerTrench® MOSFET

120 V, 128 A, 4.2 mΩ

Features

- Max $r_{DS(on)}$ = 4.2 mΩ at $V_{GS} = 10$ V, $I_D = 20$ A
- Max $r_{DS(on)}$ = 6.4 mΩ at $V_{GS} = 6$ V, $I_D = 16$ A
- Advanced Package and Silicon combination for low $r_{DS(on)}$ and high efficiency
- Next generation enhanced body diode technology, engineered for soft recovery
- Low profile 8x8mm MLP package
- MSL1 robust package design
- 100% UIL tested
- RoHS Compliant




General Description

This N-Channel MOSFET is produced using Fairchild Semiconductor's advanced PowerTrench® process. Advancements in both silicon and Dual Cool™ package technologies have been combined to offer the lowest $r_{DS(on)}$ while maintaining excellent switching performance by extremely low Junction-to-Ambient thermal resistance.


Applications

- OringFET / Load Switching
- Synchronous Rectification
- DC-DC Conversion

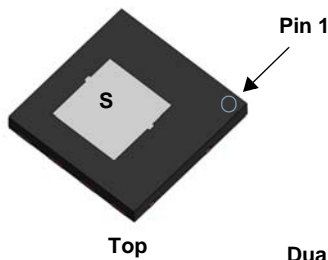


Top

Dual Cool™ 88



Bottom



MOSFET Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted.

| Symbol | Parameter | Ratings | Units |
|----------------|---|-------------|------------------|
| V_{DS} | Drain to Source Voltage | 120 | V |
| V_{GS} | Gate to Source Voltage | ± 20 | V |
| I_D | Drain Current -Continuous $T_C = 25^\circ\text{C}$ (Note 5) | 128 | A |
| | -Continuous $T_C = 100^\circ\text{C}$ (Note 5) | 81 | |
| | -Continuous $T_A = 25^\circ\text{C}$ (Note 1a) | 20 | |
| | -Pulsed (Note 4) | 767 | |
| E_{AS} | Single Pulse Avalanche Energy (Note 3) | 1350 | mJ |
| P_D | Power Dissipation $T_C = 25^\circ\text{C}$ | 156 | W |
| | Power Dissipation $T_A = 25^\circ\text{C}$ (Note 1a) | 3.2 | |
| T_J, T_{STG} | Operating and Storage Junction Temperature Range | -55 to +150 | $^\circ\text{C}$ |

Thermal Characteristics

| | | | |
|-----------------|---|-----|--------------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case (Top Source) | 1.6 | $^\circ\text{C/W}$ |
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case (Bottom Drain) | 0.8 | |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient (Note 1a) | 38 | |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient (Note 1b) | 81 | |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient (Note 1i) | 15 | |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient (Note 1j) | 21 | |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient (Note 1k) | 9 | |

Package Marking and Ordering Information

| Device Marking | Device | Package | Reel Size | Tape Width | Quantity |
|----------------|--------------|---------------|-----------|------------|------------|
| 800120DC | FDMT800120DC | Dual Cool™ 88 | 13" | 13.3 mm | 3000 units |

Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted.

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|--------|-----------|-----------------|------|------|------|-------|
|--------|-----------|-----------------|------|------|------|-------|

Off Characteristics

| | | | | | | |
|--------------------------------------|---|---|-----|----|-----|----------------------|
| BV_{DSS} | Drain to Source Breakdown Voltage | $I_D = 250\ \mu\text{A}$, $V_{GS} = 0\ \text{V}$ | 120 | | | V |
| $\frac{\Delta BV_{DSS}}{\Delta T_J}$ | Breakdown Voltage Temperature Coefficient | $I_D = 250\ \mu\text{A}$, referenced to 25°C | | 97 | | mV/ $^\circ\text{C}$ |
| I_{DSS} | Zero Gate Voltage Drain Current | $V_{DS} = 96\ \text{V}$, $V_{GS} = 0\ \text{V}$ | | | 1 | μA |
| I_{GSS} | Gate to Source Leakage Current | $V_{GS} = \pm 20\ \text{V}$, $V_{DS} = 0\ \text{V}$ | | | 100 | nA |

On Characteristics

| | | | | | | |
|--|--|--|-----|------|-----|----------------------|
| $V_{GS(th)}$ | Gate to Source Threshold Voltage | $V_{GS} = V_{DS}$, $I_D = 250\ \mu\text{A}$ | 2.0 | 3.1 | 4.0 | V |
| $\frac{\Delta V_{GS(th)}}{\Delta T_J}$ | Gate to Source Threshold Voltage Temperature Coefficient | $I_D = 250\ \mu\text{A}$, referenced to 25°C | | -12 | | mV/ $^\circ\text{C}$ |
| $r_{DS(on)}$ | Static Drain to Source On Resistance | $V_{GS} = 10\ \text{V}$, $I_D = 20\ \text{A}$ | | 3.45 | 4.2 | m Ω |
| | | $V_{GS} = 6\ \text{V}$, $I_D = 16\ \text{A}$ | | 4.6 | 6.4 | |
| | | $V_{GS} = 10\ \text{V}$, $I_D = 20\ \text{A}$, $T_J = 125^\circ\text{C}$ | | 6.3 | 7.7 | |
| g_{FS} | Forward Transconductance | $V_{DS} = 5\ \text{V}$, $I_D = 20\ \text{A}$ | | 69 | | S |

Dynamic Characteristics

| | | | | | | |
|-----------|------------------------------|---|-----|------|------|----------|
| C_{iss} | Input Capacitance | $V_{DS} = 60\ \text{V}$, $V_{GS} = 0\ \text{V}$, $f = 1\ \text{MHz}$ | | 5605 | 7850 | pF |
| C_{oss} | Output Capacitance | | | 778 | 1090 | pF |
| C_{rss} | Reverse Transfer Capacitance | | | 27 | 40 | pF |
| R_g | Gate Resistance | | 0.1 | 1.4 | 3.5 | Ω |

Switching Characteristics

| | | | | | | |
|--------------|-------------------------------|---|---|-----|-----|----|
| $t_{d(on)}$ | Turn-On Delay Time | $V_{DD} = 60\ \text{V}$, $I_D = 20\ \text{A}$, $V_{GS} = 10\ \text{V}$, $R_{GEN} = 6\ \Omega$ | | 29 | 47 | ns |
| t_r | Rise Time | | | 18 | 33 | ns |
| $t_{d(off)}$ | Turn-Off Delay Time | | | 40 | 64 | ns |
| t_f | Fall Time | | | 9.5 | 19 | ns |
| $Q_{g(TOT)}$ | Total Gate Charge | $V_{GS} = 0\ \text{V}$ to $10\ \text{V}$ | $V_{DD} = 60\ \text{V}$, $I_D = 20\ \text{A}$ | 76 | 107 | nC |
| $Q_{g(TOT)}$ | Total Gate Charge | $V_{GS} = 0\ \text{V}$ to $6\ \text{V}$ | | 48 | 68 | nC |
| Q_{gs} | Gate to Source Charge | | | 25 | | nC |
| Q_{gd} | Gate to Drain "Miller" Charge | | | 15 | | nC |

Drain-Source Diode Characteristics


| | | | | | | |
|----------|---------------------------------------|--|--|-----|-----|----|
| V_{SD} | Source to Drain Diode Forward Voltage | $V_{GS} = 0\ \text{V}$, $I_S = 2.9\ \text{A}$ (Note 2) | | 0.7 | 1.1 | V |
| | | $V_{GS} = 0\ \text{V}$, $I_S = 20\ \text{A}$ (Note 2) | | 0.8 | 1.2 | |
| t_{rr} | Reverse Recovery Time | $I_F = 20\ \text{A}$, $di/dt = 100\ \text{A}/\mu\text{s}$ | | 87 | 139 | ns |
| Q_{rr} | Reverse Recovery Charge | | | 164 | 263 | nC |

Thermal Characteristics

| | | | |
|------------------|---|-----|------|
| R _{θJC} | Thermal Resistance, Junction-to-Case (Top Source) | 1.6 | °C/W |
| R _{θJC} | Thermal Resistance, Junction-to-Case (Bottom Drain) | 0.8 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1a) | 38 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1b) | 81 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1c) | 26 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1d) | 34 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1e) | 14 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1f) | 16 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1g) | 26 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1h) | 60 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1i) | 15 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1j) | 21 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1k) | 9 | |
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1l) | 11 | |

NOTES:

1. $R_{\theta JA}$ is determined with the device mounted on a FR-4 board using a specified pad of 2 oz copper as shown below. $R_{\theta CA}$ is determined by the user's board design.

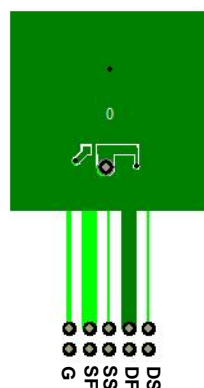

a. 38 °C/W when mounted on a 1 in² pad of 2 oz copper



b. 81 °C/W when mounted on
a minimum pad of 2 oz copper

- c. Still air, 20.9x10.4x12.7mm Aluminum Heat Sink, 1 in² pad of 2 oz copper
- d. Still air, 20.9x10.4x12.7mm Aluminum Heat Sink, minimum pad of 2 oz copper
- e. Still air, 45.2x41.4x11.7mm Aavid Thermalloy Part # 10-L41B-11 Heat Sink, 1 in² pad of 2 oz copper
- f. Still air, 45.2x41.4x11.7mm Aavid Thermalloy Part # 10-L41B-11 Heat Sink, minimum pad of 2 oz copper
- g. 200FPM Airflow, No Heat Sink, 1 in² pad of 2 oz copper
- h. 200FPM Airflow, No Heat Sink, minimum pad of 2 oz copper
- i. 200FPM Airflow, 20.9x10.4x12.7mm Aluminum Heat Sink, 1 in² pad of 2 oz copper
- j. 200FPM Airflow, 20.9x10.4x12.7mm Aluminum Heat Sink, minimum pad of 2 oz copper
- k. 200FPM Airflow, 45.2x41.4x11.7mm Aavid Thermalloy Part # 10-L41B-11 Heat Sink, 1 in² pad of 2 oz copper
- l. 200FPM Airflow, 45.2x41.4x11.7mm Aavid Thermalloy Part # 10-L41B-11 Heat Sink, minimum pad of 2 oz copper

2. Pulse Test: Pulse Width < 300 μ s, Duty cycle < 2.0%.
3. E_{AS} of 1350 mJ is based on starting T_J = 25 °C; N-ch: L = 3 mH, I_{AS} = 30 A, V_{DD} = 120 V, V_{GS} = 10 V. 100% test at L = 0.1 mH, I_{AS} = 93 A.
4. Pulsed Id please refer to Fig 11 SOA graph for more details.
5. Computed continuous current limited to Max Junction Temperature only, actual continuous current will be limited by thermal & electro-mechanical application board design.

Typical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

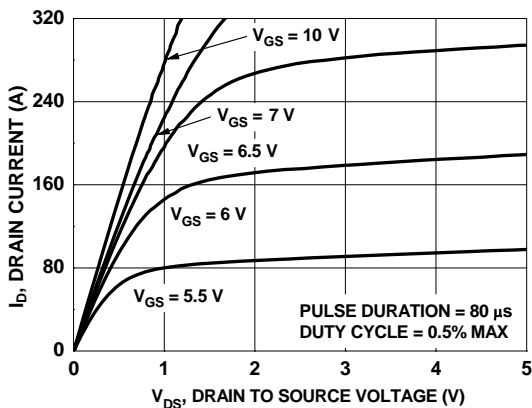


Figure 1. On-Region Characteristics

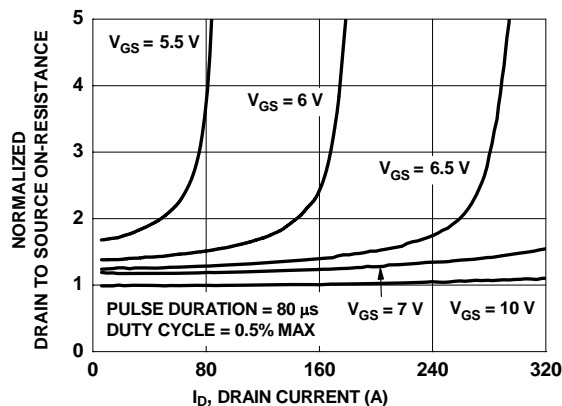


Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage

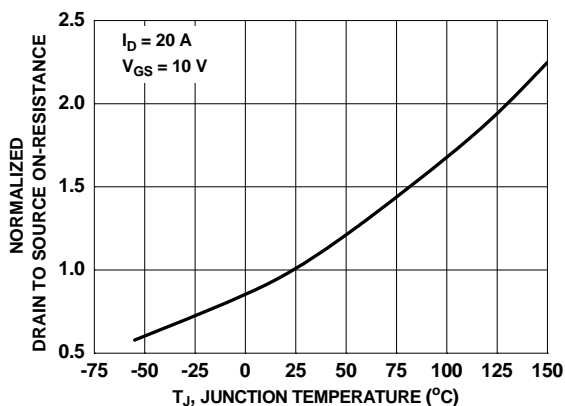


Figure 3. Normalized On-Resistance vs Junction Temperature

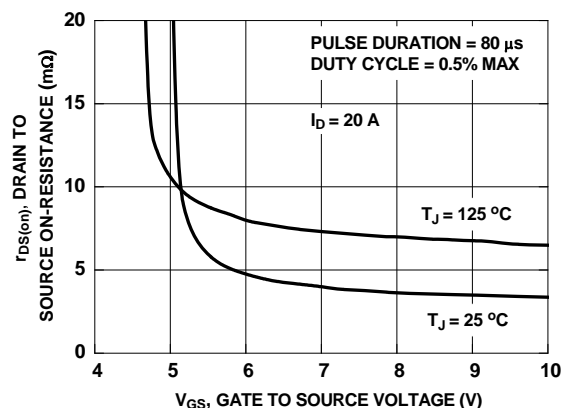


Figure 4. On-Resistance vs Gate to Source Voltage

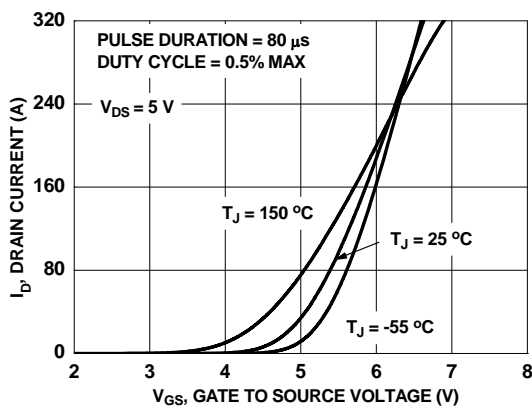


Figure 5. Transfer Characteristics

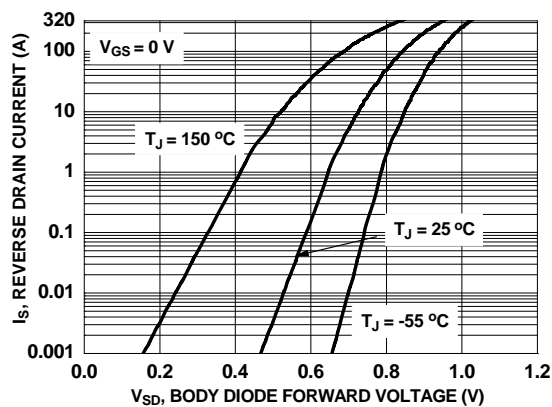


Figure 6. Source to Drain Diode Forward Voltage vs Source Current

Typical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise noted

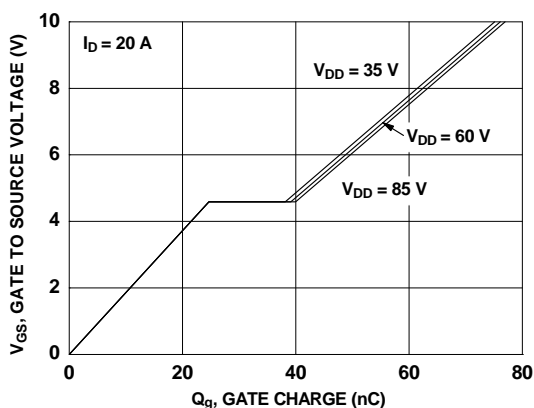


Figure 7. Gate Charge Characteristics

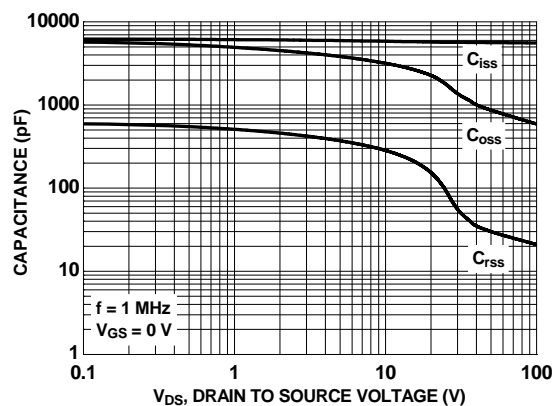


Figure 8. Capacitance vs Drain to Source Voltage

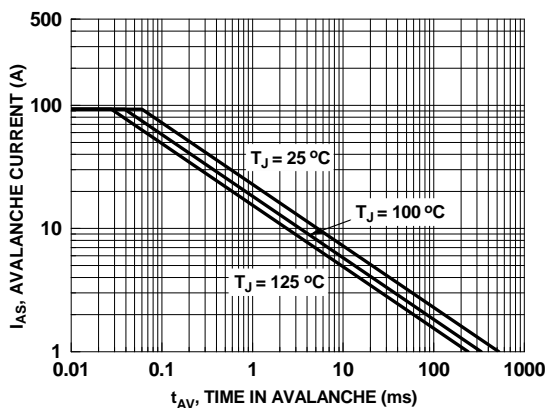


Figure 9. Unclamped Inductive Switching Capability

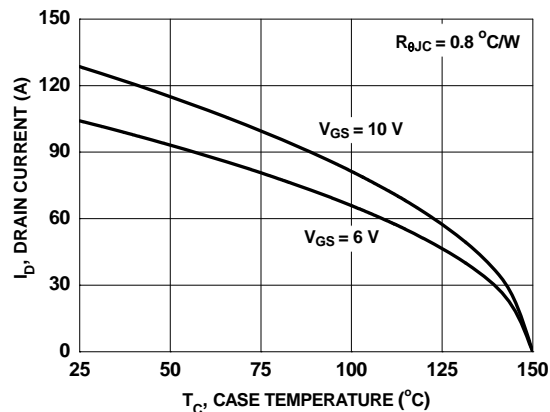


Figure 10. Maximum Continuous Drain Current vs Case Temperature

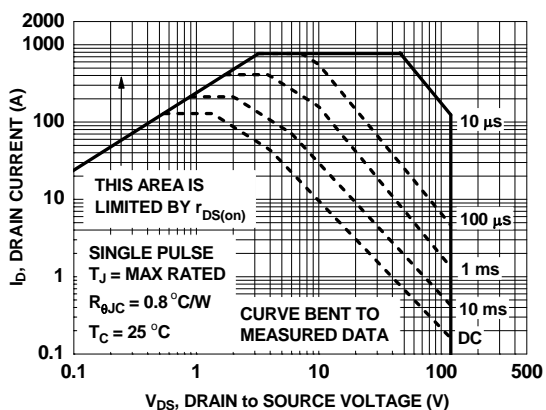


Figure 11. Forward Bias Safe Operating Area






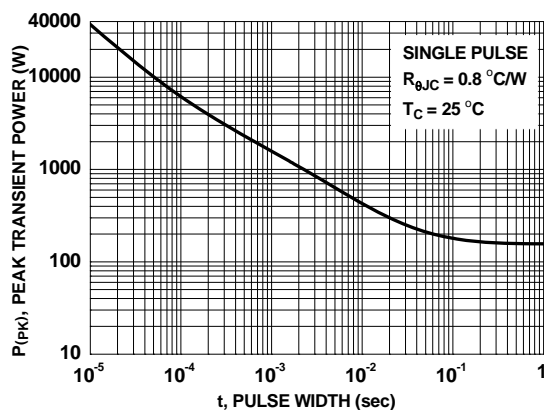



Figure 12. Single Pulse Maximum Power Dissipation

Typical Characteristics $T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise noted

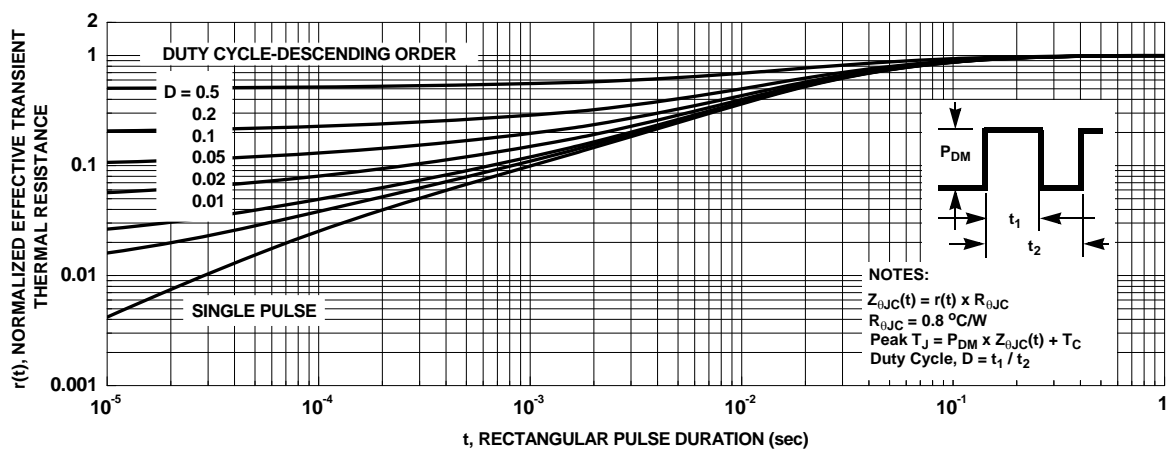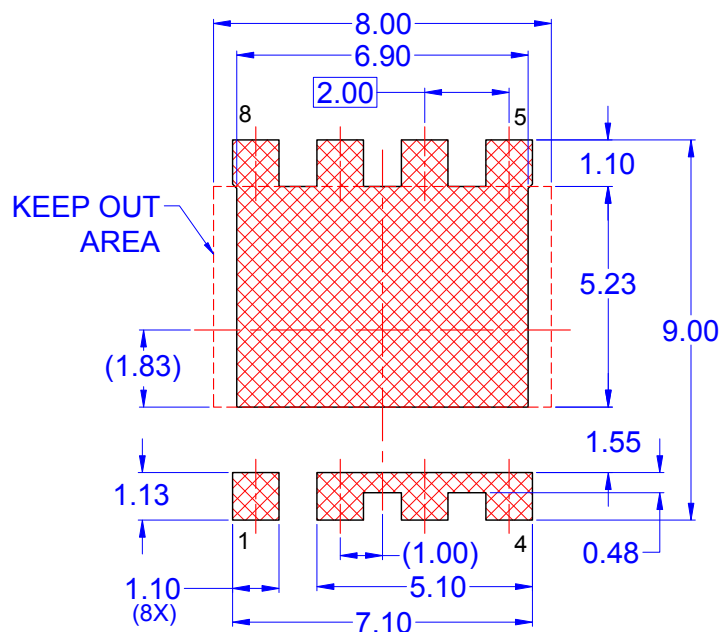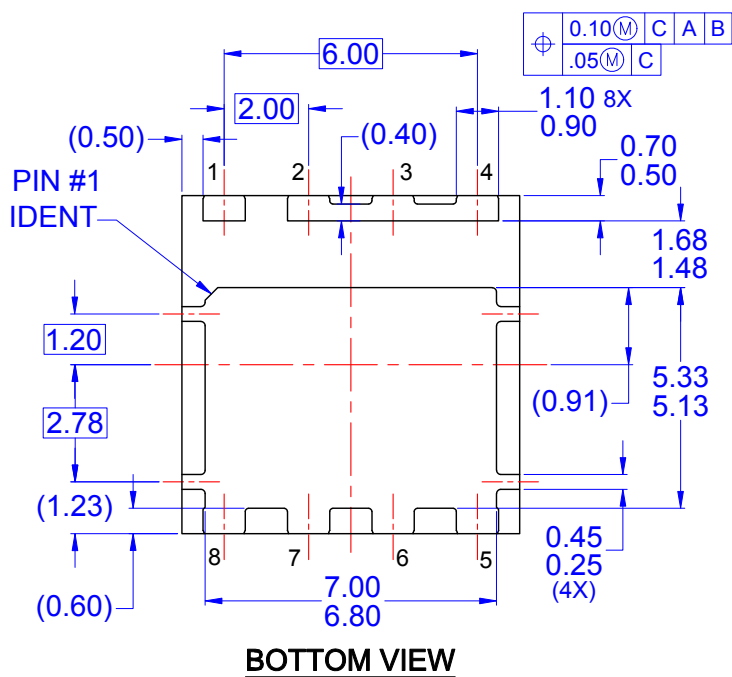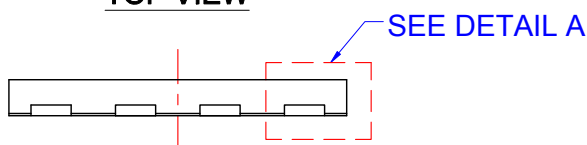

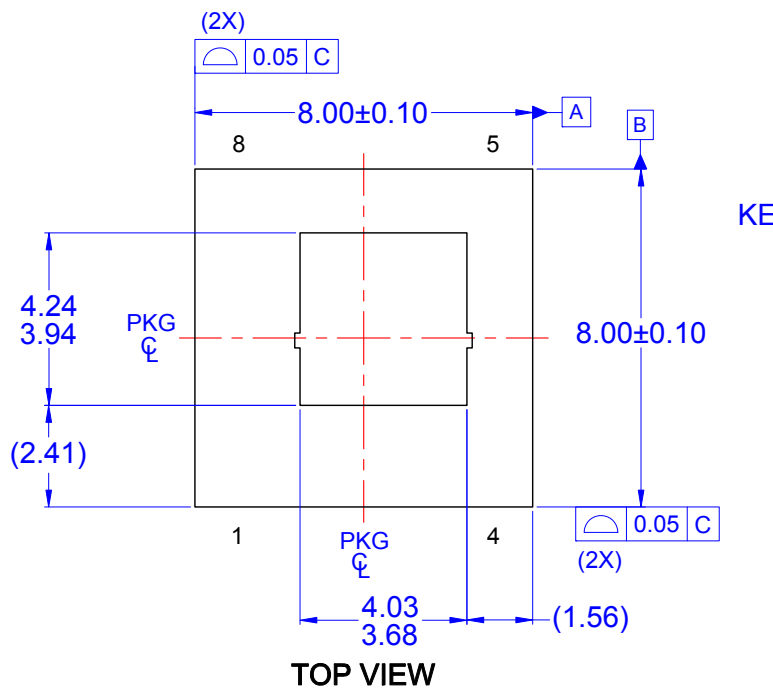

LAND PATTERN RECOMMENDATION

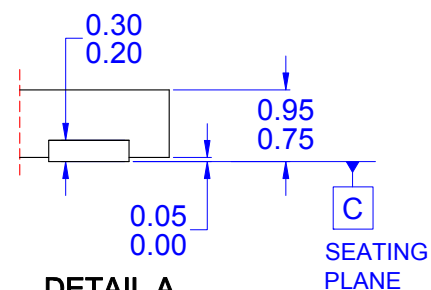

DETAIL A
SCALE: 2X

- NOTES: UNLESS OTHERWISE SPECIFIED
- A) THIS PACKAGE IS NOT PRESENTLY REGISTERED WITH ANY STANDARDS COMMITTEE.
 - B) DIMENSIONS ARE INCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR PROTRUSIONS.
 - C) ALL DIMENSIONS ARE IN MILLIMETERS.
 - D) DRAWING CONFORMS TO ASME Y14.5M-2009.
 - E) IT IS RECOMMENDED TO HAVE NO TRACES OR VIAS WITHIN THE KEEP OUT AREA.
 - F) DRAWING FILENAME: MKT-PQFN08RREV2





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™
AttitudeEngine™
Awinda®
AX-CAP®
BitSiC™
Build it Now™
CorePLUS™
CorePOWER™
CROSSVOLT™
CTL™
Current Transfer Logic™
DEUXPEED®
Dual Cool™
EcoSPARK®
EfficientMax™
ESBC™
F®
Fairchild®
Fairchild Semiconductor®
FACT Quiet Series™
FACT®
FastvCore™
FETBench™
FPS™
F-PFS™
FRFET®
Global Power Resource™
GreenBridge™
Green FPS™
Green FPS™ e-Series™
Gmax™
GTO™
IntelliMAX™
ISOPLANAR™
Making Small Speakers Sound Louder and Better™
MegaBuck™
MICROCOUPLER™
MicroFET™
MicroPak™
MicroPak2™
MillerDrive™
MotionMax™
MotionGrid®
MTI®
MTx®
MVN®
mWSaver®
OptoHiT™
OPTOLOGIC®

OPTOPLANAR®
Power Supply WebDesigner™
PowerTrench®
PowerXS™
Programmable Active Droop™
QFET®
QS™
Quiet Series™
RapidConfigure™
Saving our world, 1mW/W/kW at a time™
SignalWise™
SmartMax™
SMART START™
Solutions for Your Success™
SPM®
STEALTH™
SuperFET®
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS®
SyncFET™
Sync-Lock™

SYSTEM GENERAL®
TinyBoost®
TinyBuck®
TinyCalc™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPWM™
TinyWire™
TranSiC™
TriFault Detect™
TRUECURRENT®
μSerDes™
SerDes®
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™
XS™
Xsens™
仙童®

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT [HTTP://WWW.FAIRCHILDSEMI.COM](http://www.fairchildsemi.com). FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

AUTHORIZED USE

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|-----------------------|---|
| Advance Information | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design. |
| Obsolete | Not In Production | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only. |

Rev. I77