


Compact Wireless M-Bus Radio Module

868 MHz ISM Band

Key Features

- Low-cost Wireless M-Bus radio module (868 MHz ISM Band)
- Embedded Wireless M-Bus according to EN13757-4:2005 standard
- Range up to 700 m (line of sight)
- Small form factor: 16 x 27 x 3.5 mm
- Optimized for battery use
- Easy switching between operating modes S1, S1m, S2, T1, T2, R2
- Communication and Configuration via UART/SPI Interface
- Supporting AES128 data encryption
- Conforms with EU R&TTE 1999/5/EC directive
- Available on Tape & Reel for SMD mounting

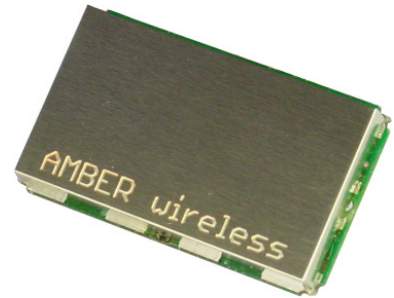

Description

The Wireless M-Bus standard (EN13757-4:2005) specifies the communication between water, gas, heat and electricity meters and concentrators. The standard comprises various operating modes (S, T and R) to meet the requirements of one-way and two-way data communication in stationary and mobile systems.

The AMB8425-M is an all embedded low-cost wireless M-Bus radio module, which operates in 12 channels in the 868 MHz frequency band. The integrated protocol controls the entire data communication. Data packets are built and transmitted according to EN13757-4:2005 specification. Configuration of parameters is handled via the UART interface. The module automatically adds the Manufacturer ID and the Address based on parameters configured in the radio module. Measured field strength (RSSI value) offers the option of enhancing quality of the radio link.

The customised application layer can be fully integrated in the radio module, thus eliminating the need for an external host microcontroller. The radio module supports the AES-128 encryption standard. A very low-power mode ensures long battery lifetime.

The module is pre-certified for operation under the European radio regulations for license-free use. Due to its outstanding RF characteristics the module achieves a range of up to 700 metres line of sight. The AMB8425-M is a surface-mounted module and is available on Tape & Reel for volume production.


Interfaces

The AMB8425-M is connected to a host system via the UART interface with a data rate of up to 115.2 kbps. The interface can also be used as a SPI interface with a maximum data rate of 1Mbps. When using appropriate firmware, the module is also suitable for autonomously recording digital or analogue signals. Other pins can be used for data flow control and to switch between operating modes.

Range of Applications

The radio module is designed for automatic meter reading applications for wireless data transmission according to the Wireless M-Bus specification (EN13757-4:2005). The radio module is designed to be integrated in meters, Concentrators and mobile metering devices. Other applications are conceivable. Its compact dimensions and low-power consumption make the radio module ideal for battery-powered devices.

Dimensions

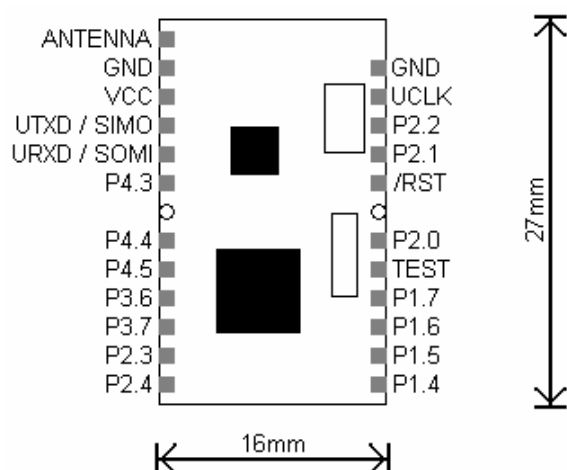

Pin Assignment

Pad Name	Description
ANTENNA	Antenna connection
GND	Negative supply voltage
VCC	Positive supply voltage
UTXD, URXD	UART Transmit , UART Receive
SIMO	Slave In Master Out (SPI)
SOMI	Slave Out Master In (SPI)
UCLK	CLK (SPI)
/RST	Reset-Input
PX.X	OP-Amp. / ADC / GPIO / Timer / JTAG

Specifications

Performance	Range	Up to 700 metres (depending on operating mode and used antenna)
	RF data rate	2.4 / 16.384 / 66.6 kbps (according to EN 13757-4:2005)
	Interface data rate	Up to 115.2 kbps (UART)
	Output power	10 dBm (50 Ω)
	RF sensitivity	S: typ. -103 dBm T: typ. -100 dBm R: typ. -107 dBm
General	Power supply	2.7 – 3.6 V
	Power consumption	TX: typ. 36 mA RX: typ. 24 mA Low Power: typ. < 1µA
	Dimensions	16 x 27 x 3,5 mm
	Operating temperature	-30 to +85 °C
	Weight	< 2 g
	Antenna	External antenna connector
	Microprocessor	Texas Instruments MSP430F22xx
	RF transceiver	Texas Instruments CC1101
RF technology	Frequency range	863.03 - 868.95 MHz
	Channel spacing	868.03 MHz + k • 0.06 MHz k=[0,9] 868.30 MHz 868.95 MHz
	Modulation	2-FSK
Conformity	Europe	EN 300220, EN 301489, EN 60950, EN 50371

Related Products

- **AMB8425-M-EV** Evaluation-Kit

Ordering information

Part No.	Description
AMB8425-M	Wireless M-Bus Radio Module

Contact

AMBER wireless GmbH
 Albin-Köbis-Straße 18
 D-51147 Köln
 Tel.: +49 (0) 2203-699195-0
 E-mail: info@amber-wireless.de
 Internet: www.amber-wireless.de