

BLF6G13L-250P; BLF6G13LS-250P

Power LDMOS transistor

Rev. 2 — 21 March 2011

Objective data sheet

1. Product profile

1.1 General description

250 W LDMOS power transistor intended for CW applications at a frequency of 1.3 GHz.

Table 1. Test information

Typical RF performance at $T_{case} = 25^\circ\text{C}$; $I_{Dq} = 100 \text{ mA}$; in a class-AB production test circuit.

Mode of operation	f (GHz)	V _{DS} (V)	P _{L(1dB)} (W)	G _p (dB)	η _D (%)
CW	1.3	50	250	17	56

1.2 Features and benefits

- Typical CW performance at a frequency of 1.3 GHz, a supply voltage of 50 V, an I_{Dq} of 100 mA:
 - ◆ Output power = 250 W
 - ◆ Power gain = 17 dB
 - ◆ Efficiency = 56 %
- Easy power control
- Integrated ESD protection
- Excellent ruggedness
- High efficiency
- Excellent thermal stability
- Internally matched for ease of use
- Compliant to Directive 2002/95/EC, regarding Restriction of Hazardous Substances (RoHS)





1.3 Applications

- Industrial, scientific and medical applications



2. Pinning information

Table 2. Pinning

Pin	Description	Simplified outline	Graphic symbol
BLF6G13L-250P (SOT1121A)			
1	drain1		
2	drain2		
3	gate1		
4	gate2		
5	source	[1]	 
BLF6G13LS-250P (SOT1121B)			
1	drain1		
2	drain2		
3	gate1		
4	gate2		
5	source	[1]	 

[1] Connected to flange.

3. Ordering information

Table 3. Ordering information

Type number	Package			Version
	Name	Description		
BLF6G13L-250P	-	flanged LDMOST ceramic package; 2 mounting holes; 4 leads		SOT1121A
BLF6G13LS-250P	-	earless flanged LDMOST ceramic package; 4 leads		SOT1121B

4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	drain-source voltage		-	100	V
V_{GS}	gate-source voltage		-0.5	+13	V
I_D	drain current		-	42	A
T_{stg}	storage temperature		-65	+150	°C
T_j	junction temperature		-	200	°C

5. Thermal characteristics

Table 5. Thermal characteristics

Symbol	Parameter	Conditions	Typ	Unit
$R_{th(j-c)}$	thermal resistance from junction to case	$T_{case} = 85^\circ\text{C}$; $P_L = 250 \text{ W}$	0.26	K/W

6. Characteristics

Table 6. DC characteristics

$T_j = 25^\circ\text{C}$; per section unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{(BR)DSS}$	drain-source breakdown voltage	$V_{GS} = 0 \text{ V}$; $I_D = 1.4 \text{ mA}$	100	-	-	V
$V_{GS(th)}$	gate-source threshold voltage	$V_{DS} = 10 \text{ V}$; $I_D = 235 \text{ mA}$	1.3	1.8	2.25	V
I_{DSS}	drain leakage current	$V_{GS} = 0 \text{ V}$; $V_{DS} = 50 \text{ V}$	-	-	0.7	μA
I_{DSX}	drain cut-off current	$V_{GS} = V_{GS(th)} + 3.75 \text{ V}$; $V_{DS} = 10 \text{ V}$	16	21	-	A
I_{GSS}	gate leakage current	$V_{GS} = 11 \text{ V}$; $V_{DS} = 0 \text{ V}$	-	-	70	nA
g_f	forward transconductance	$V_{DS} = 10 \text{ V}$; $I_D = 120 \text{ mA}$	-	1	-	S
$R_{DS(on)}$	drain-source on-state resistance	$V_{GS} = V_{GS(th)} + 3.75 \text{ V}$; $I_D = 4.75 \text{ A}$	-	200	340	$\text{m}\Omega$

Table 7. RF characteristics

Mode of operation: CW; $f = 1.3 \text{ GHz}$; RF performance at $V_{DS} = 50 \text{ V}$; $I_{Dq} = 100 \text{ mA}$; $T_{case} = 25^\circ\text{C}$; unless otherwise specified, in a class-AB production test circuit.


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
P_L	output power		250	-	-	W
V_{DS}	drain-source voltage	$P_L = 250 \text{ W}$	-	-	50	V
G_p	power gain	$P_L = 250 \text{ W}$	15	17	-	dB
RL_{in}	input return loss	$P_L = 250 \text{ W}$	-	-30	-20	dB
η_D	drain efficiency	$P_L = 250 \text{ W}$	53	56	-	%

6.1 Ruggedness in class-AB operation


The BLF6G13L-250P and BLF6G13LS-250P are capable of withstanding a load mismatch corresponding to $VSWR = 5 : 1$ through all phases under the following conditions: $V_{DS} = 50 \text{ V}$; $I_{Dq} = 100 \text{ mA}$; $P_L = 250 \text{ W}$; $f = 1.3 \text{ GHz}$.


7. Application information

7.1 CW

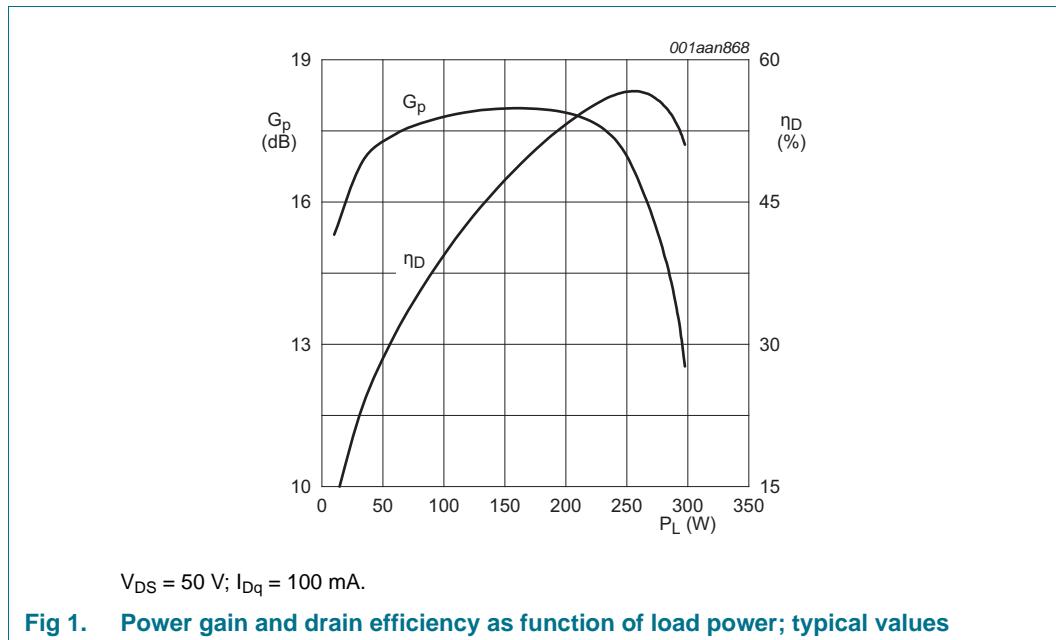

7.2 2-Carrier CW

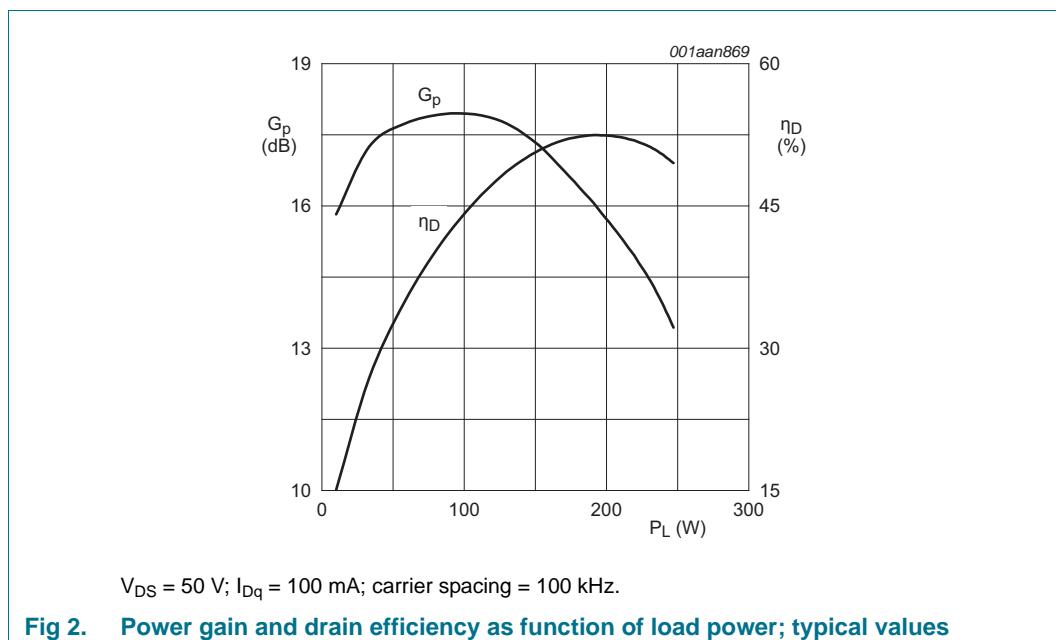


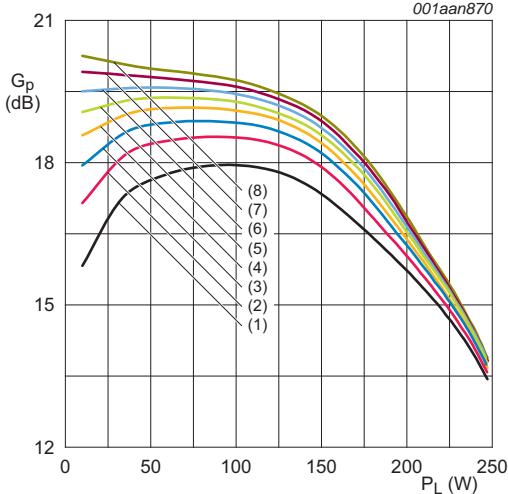

$V_{DS} = 50$ V; $f = 1300$ MHz; carrier spacing = 100 kHz.

- (1) $I_{Dq} = 100$ MHz
- (2) $I_{Dq} = 300$ MHz
- (3) $I_{Dq} = 500$ MHz
- (4) $I_{Dq} = 700$ MHz
- (5) $I_{Dq} = 900$ MHz
- (6) $I_{Dq} = 1100$ MHz
- (7) $I_{Dq} = 1300$ MHz
- (8) $I_{Dq} = 1500$ MHz

Fig 3. Power gain as a function of load power; typical values

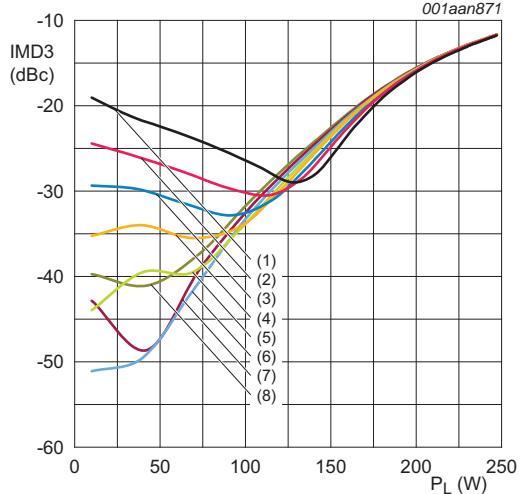

$V_{DS} = 50$ V; $f = 1300$ MHz; carrier spacing = 100 kHz.

- (1) $I_{Dq} = 100$ MHz
- (2) $I_{Dq} = 300$ MHz
- (3) $I_{Dq} = 500$ MHz
- (4) $I_{Dq} = 700$ MHz
- (5) $I_{Dq} = 900$ MHz
- (6) $I_{Dq} = 1100$ MHz
- (7) $I_{Dq} = 1300$ MHz
- (8) $I_{Dq} = 1500$ MHz

Fig 4. Third order intermodulation distortion as a function of load power; typical values

7.3 Impedance information

Table 8. Typical impedance

Typical values valid per section unless otherwise specified.

f MHz	Z_S Ω	Z_L optimized for G_p Ω	Z_L optimized for η_D Ω
1200	3.03 – j8.15	2.03 – j0.25	1.46 – j0.47
1300	4.06 – j9.52	1.67 – j0.92	1.19 – j0.95
1400	7.00 – j9.61	1.50 – j1.48	1.22 – j1.49




Fig 5. Definition of transistor impedance

7.4 Circuit information

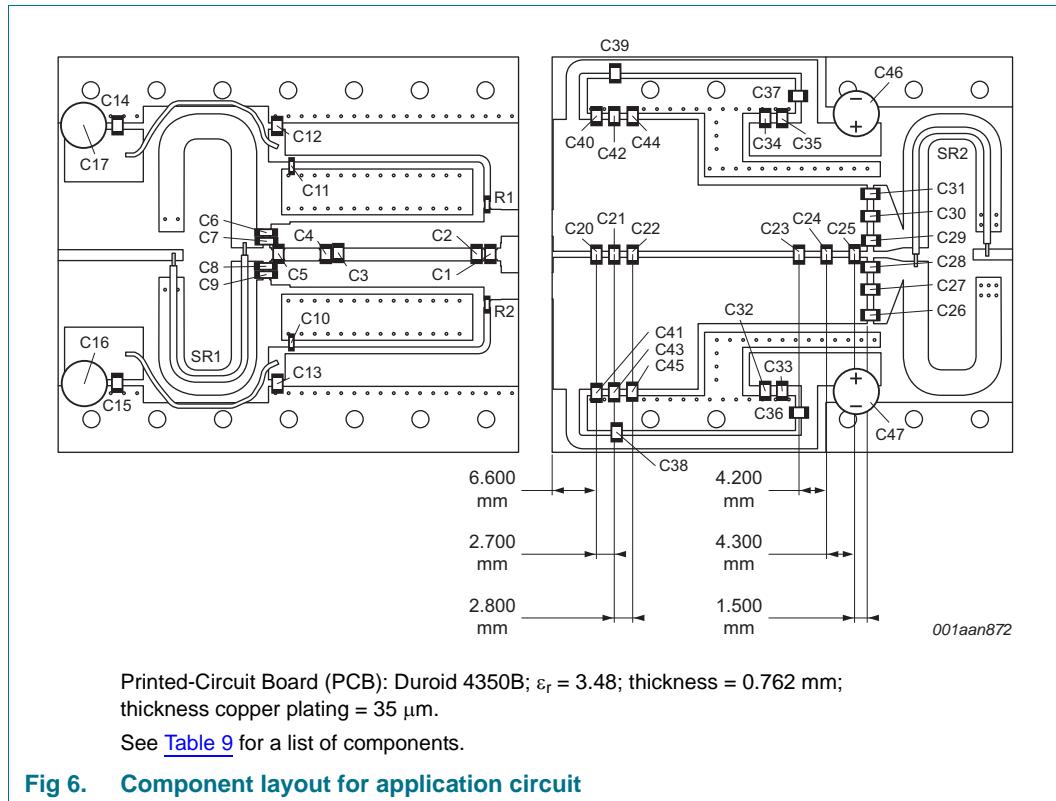


Table 9. List of components

For application circuit see [Figure 6](#).

Component	Description	Value	Remarks
C1, C2	multilayer ceramic chip capacitor	1.9 pF	[1]
C3, C4	multilayer ceramic chip capacitor	4.7 pF	[1]
C5	multilayer ceramic chip capacitor	10 pF	[1]
C6, C7, C8, C9, C10, C11, C38, C39	multilayer ceramic chip capacitor	56 pF	[1]
C12, C13	multilayer ceramic chip capacitor	100 pF	[2]
C14, C15, C32, C34	multilayer ceramic chip capacitor	1 nF	[2]
C16, C17	electrolytic capacitor	10 μF ; 50 V	220 X5R
C20, C21, C22, C23	multilayer ceramic chip capacitor	3.0 pF	[1]
C40, C41	multilayer ceramic chip capacitor	2.4 pF	[1]
C42, C43, C44, C45	multilayer ceramic chip capacitor	2.7 pF	[1]
C24	multilayer ceramic chip capacitor	0.8 pF	[1]
C25	multilayer ceramic chip capacitor	0.6 pF	[1]
C26, C27, C28, C29, C30, C31, C33, C35	multilayer ceramic chip capacitor	100 pF	[1]
C36, C37	multilayer ceramic chip capacitor	20 nF	[3]
C46, C47	electrolytic capacitor	100 μF ; 63 V	

Table 9. List of components ...continued
For application circuit see [Figure 6](#).

Component	Description	Value	Remarks
R1, R2	SMD resistor 0603	5.1 Ω	UT-141C-25-TP
SR1	COAX	25 Ω	UT-141C-35-TP
SR2	COAX	35 Ω	

[1] American Technical Ceramics type 800B or capacitor of same quality.

[2] American Technical Ceramics type 100B or capacitor of same quality.

[3] American Technical Ceramics type 200B or capacitor of same quality.

8. Package outline


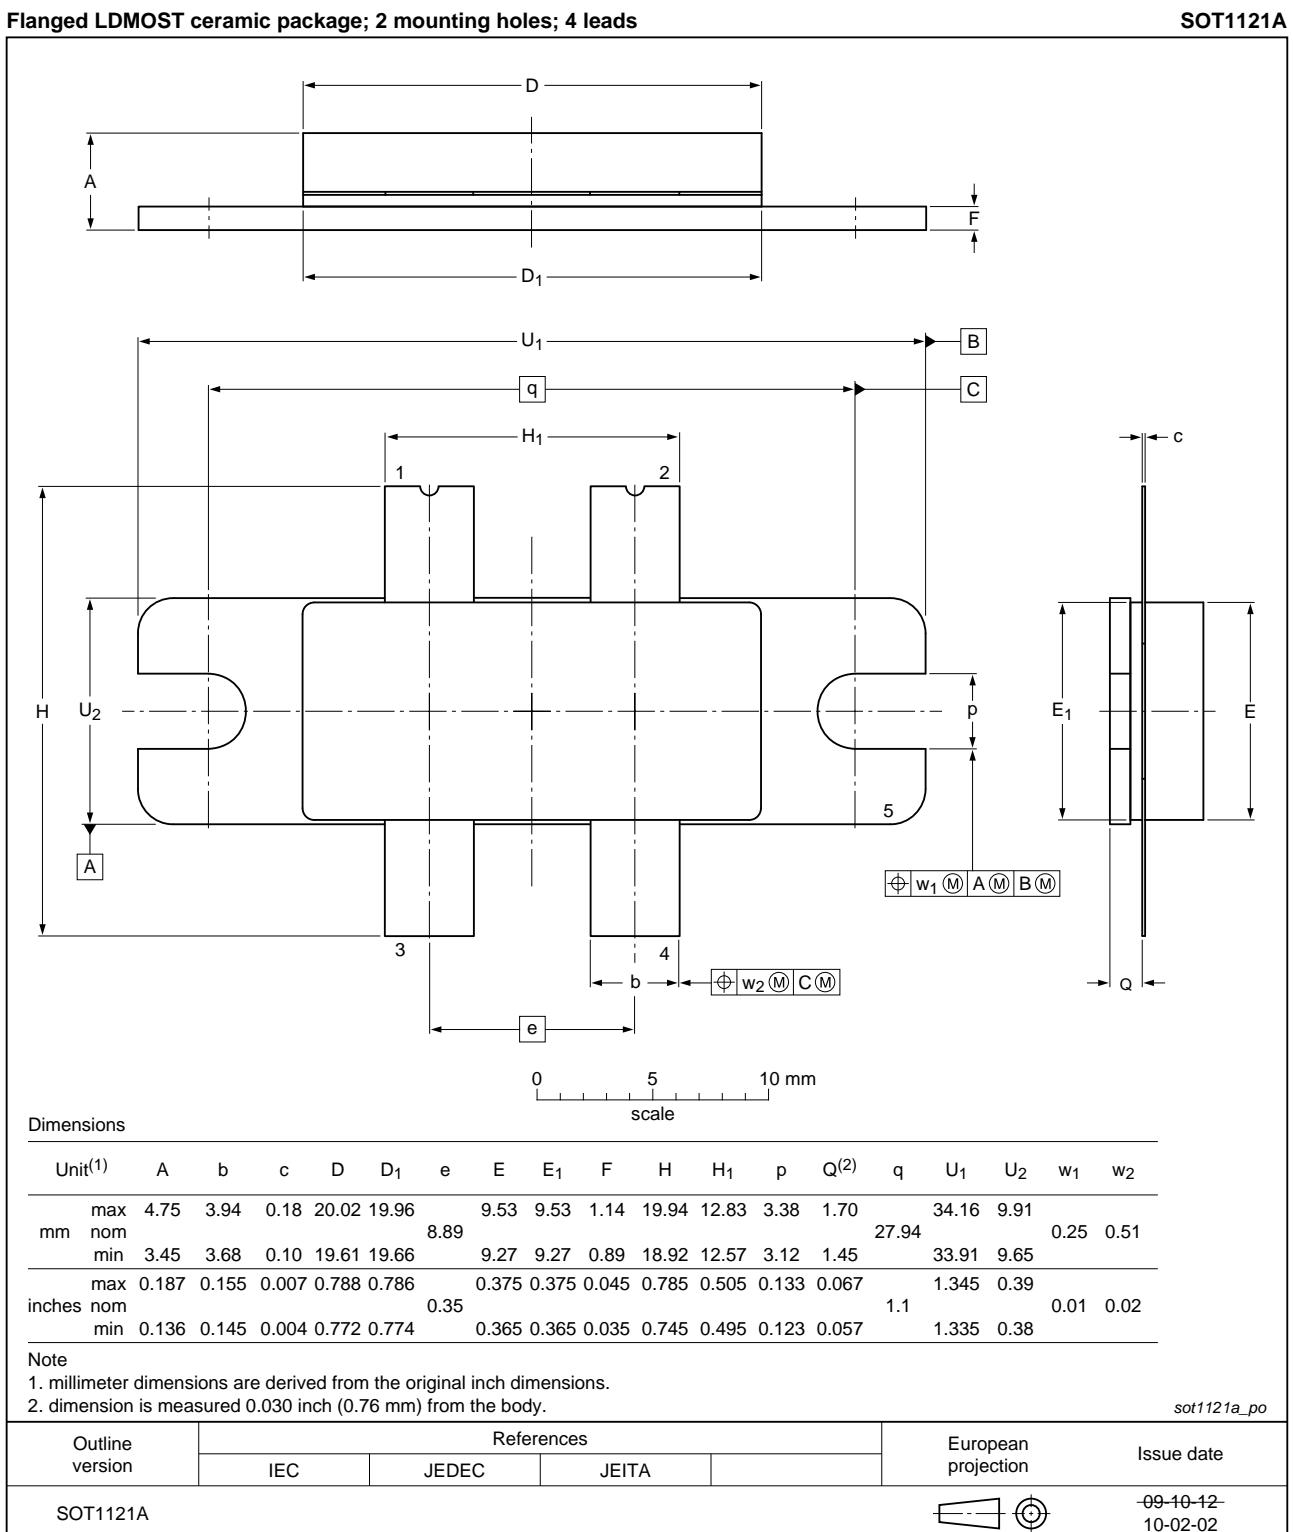


Fig 7. Package outline SOT1121A

Earless flanged LDMOST ceramic package; 4 leads

SOT1121B

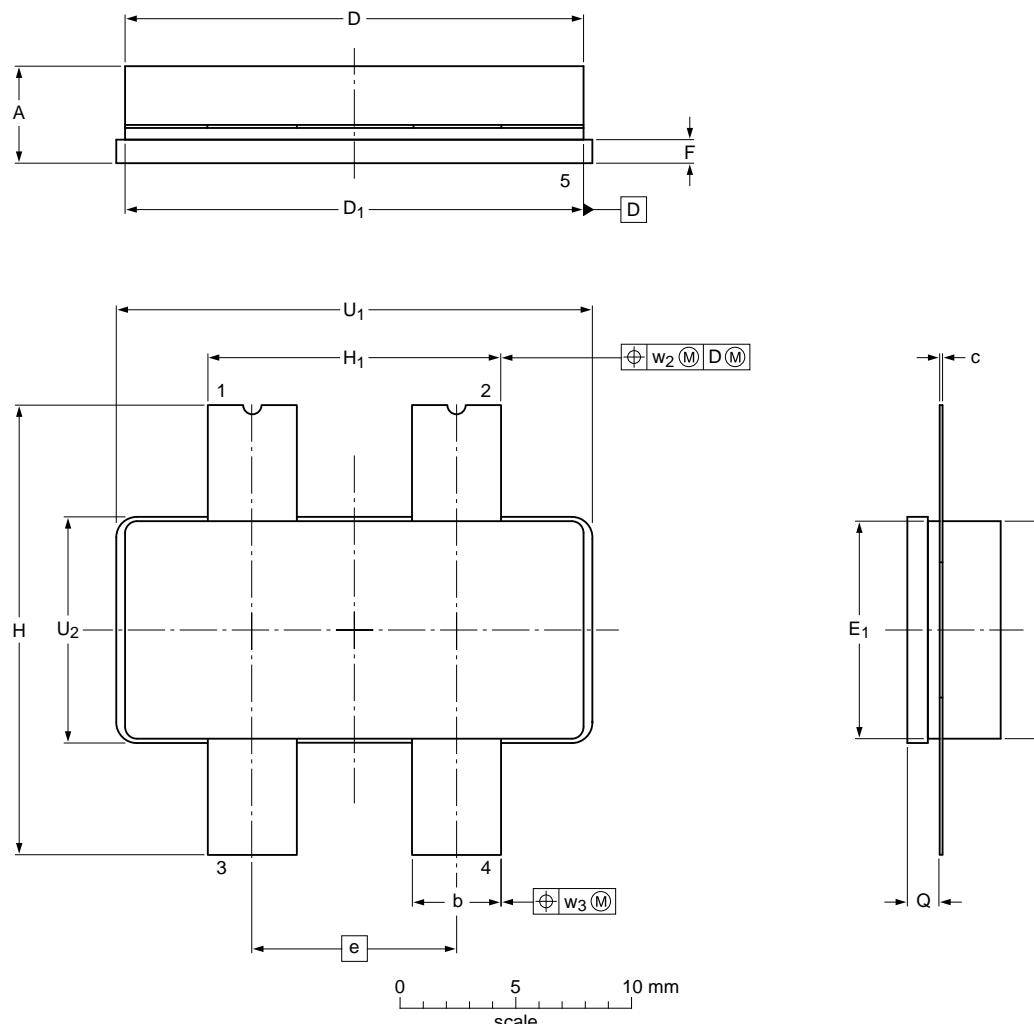

Dimensions

Unit ⁽¹⁾	A	b	c	D	D ₁	e	E	E ₁	F	H	H ₁	Q	U ₁	U ₂	w ₂	w ₃
mm	max 4.75	3.94	0.18	20.02	19.96		9.53	9.53	1.14	19.94	12.83	1.70	20.70	9.91		
mm	nom					8.89									0.51	0.25
mm	min 3.45	3.68	0.08	19.61	19.66		9.27	9.27	0.89	18.92	12.57	1.45	20.45	9.65		
inches	max 0.187	0.155	0.007	0.788	0.786		0.375	0.375	0.045	0.785	0.505	0.067	0.815	0.39		
inches	nom					0.35								0.02	0.01	
inches	min 0.136	0.145	0.003	0.772	0.774		0.365	0.365	0.035	0.745	0.495	0.057	0.805	0.38		

Note

1. millimeter dimensions are derived from the original inch dimensions.
2. dimension is measured 0.030 inch (0.76 mm) from the body.

sot1121b_po

Outline version	References			European projection	Issue date
	IEC	JEDEC	JEITA		
SOT1121B					09-10-12-09-12-14

Fig 8. Package outline SOT1121B

9. Handling information

CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices.

Such precautions are described in the *ANSI/ESD S20.20*, *IEC/ST 61340-5*, *JESD625-A* or equivalent standards.

10. Abbreviations

Table 10. Abbreviations

Acronym	Description
CW	Continuous Wave
LDMOS	Laterally Diffused Metal-Oxide Semiconductor
LDMOST	Laterally Diffused Metal-Oxide Semiconductor Transistor
RF	Radio Frequency
SMD	Surface Mount Device
VSWR	Voltage Standing-Wave Ratio

11. Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BLF6G13L-250P_6G13LS-250P v.2	20110321	Objective data sheet	-	BLF6G13L-250P_6G13LS-250P v.1
Modifications:	<ul style="list-style-type: none"> • Table 1 on page 1: Some values have been changed • Section 1.2 on page 1: Some values have been changed • Table 5 on page 3: The value for $R_{th(j-c)}$ has been changed • Table 6 on page 3: The data concerning g_{fs} has been updated • Section 7 on page 4: This section has been added 			
BLF6G13L-250P_6G13LS-250P v.1	20101102	Objective data sheet	-	-

12. Legal information

12.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

13. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

14. Contents

1	Product profile	1
1.1	General description	1
1.2	Features and benefits	1
1.3	Applications	1
2	Pinning information	2
3	Ordering information	2
4	Limiting values	2
5	Thermal characteristics	3
6	Characteristics	3
6.1	Ruggedness in class-AB operation	3
7	Application information	4
7.1	CW	4
7.2	2-Carrier CW	4
7.3	Impedance information	5
7.4	Circuit information	6
8	Package outline	8
9	Handling information	10
10	Abbreviations	10
11	Revision history	10
12	Legal information	11
12.1	Data sheet status	11
12.2	Definitions	11
12.3	Disclaimers	11
12.4	Trademarks	12
13	Contact information	12
14	Contents	13

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2011.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 21 March 2011

Document identifier: BLF6G13L-250P_6G13LS-250P